



STORM-T3

HF driver




- Description:**
- 4 "(10cm) die-cast metal body
 - 1.0 "(2.54cm) high temperature voice coil
 - Titanium diaphragm
 - Recommended HP crossover cutoff frequency: 8kHz / 12dB

Technical features:

Power RMS (Watts)	51
Maximum power (Watts)	91
Nominal impedance (Ohm)	4
Voice coil diameter	1" (25,4mm)
Magnet structure weight	5,3 Oz (150g)
Frequency response (Hz)	2500-22000
SPL (dB)	101
Overall depth L1(mm)	46
Mounting depth L1 (mm)	26
Overall diameter L2 (mm)	100
Mounting diameter L2 (mm)	73

RESPONSE CURVES, 1W/1M

STORM-T3

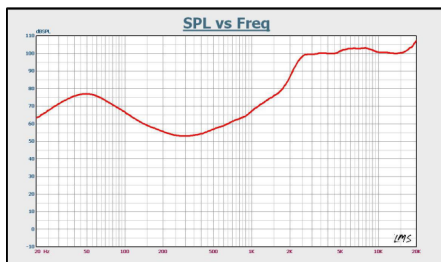

In order to improve product quality, product specifications and features are subject to change without prior notice.

©2019 AURA Electronics Inc. All rights reserved.

www.aurael.ru