



INDIGO-T5

HF driver



- Description:**
- 4 "(10cm) die-cast metal body
 - 1.0 "(2.54cm) high temperature voice coil
 - Titanium diaphragm
 - Recommended HP crossover cutoff frequency: 8kHz / 12dB

Technical features:

Power RMS (Watts)	71
Maximum power (Watts)	121
Nominal impedance (Ohm)	4
Voice coil diameter	1" (25,4mm)
Magnet structure weight	8 Oz (226g)
Frequency response (Hz)	2500-23000
SPL (dB)	102
Overall depth L1(mm)	49
Mounting depth L1 (mm)	33
Overall diameter L2 (mm)	95
Mounting diameter L2 (mm)	73

RESPONSE CURVES, 1W/1M

INDIGO-T5

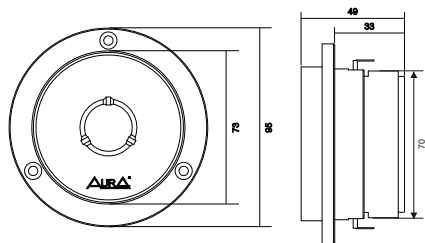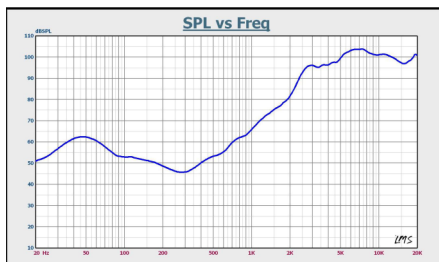

In order to improve product quality, product specifications and features are subject to change without prior notice.

©2019 AURA Electronics Inc. All rights reserved.

www.aurael.ru